

Contactors and Contactor Assemblies

Contactors for Switching Motors

SIRIUS



3RT10 contactors, 3-pole

Selection and ordering data

* AC or DC Coil

* Screw Terminals or Spring Loaded Terminal



3RT10 1.-1A...



3RT10 1.-2A...



3RT10 2.-1A...00



3RT10 2.-3A...00



3RT10 3.-1A...00



3RT10 4.-1A...00

Frame size	Amp ratings		Single phase HP ratings		Three phase HP ratings				Auxiliary contacts		Screw terminals	Spring loaded terminals ¹⁾	Weight approx. AC/DC
	AC3	AC1	115 V	230 V	200 V	230 V	460 V	575 V	NO	NC	Order No.	Order No.	kg
S00	7	18	0.25	0.75	1.5	2	3	5	1 0	0 1	3RT10 15-1□●●1 3RT10 15-1□●●2	3RT10 15-2□●●1 3RT10 15-2□●●2	0.20/0.26
	9	22	0.33	1	2	3	5	7.5	1 0	0 1	3RT10 16-1□●●1 3RT10 16-2□●●2	3RT10 16-2□●●1 3RT10 16-2□●●2	
	12	22	0.5	2	3	3	7.5	10	1 0	0 1	3RT10 17-1□●●1 3RT10 17-1□●●2	3RT10 17-2□●●1 3RT10 17-2□●●2	
S0	9	40	0.33	1	2	3	5	7.5	0 0	0 0	3RT10 23-1□●●0	3RT10 23-3□●●0	0.35/0.58
	12	40	0.5	2	3	3	7.5	10	0 0	0 0	3RT10 24-1□●●0	3RT10 24-3□●●0	
	17	40	1	3	5	5	10	15	0 0	0 0	3RT10 25-1□●●0	3RT10 25-3□●●0	
	25	40	2	3	7.5	7.5	15	20	0 0	0 0	3RT10 26-1□●●0	3RT10 26-3□●●0	
S2	28	50	2	5	7.5	10	20	25	0 0	0 0	3RT10 33-1□●●0	3RT10 33-3□●●0	0.85/1.45
	32	50	2	5	10	10	25	30	0 0	0 0	3RT10 34-1□●●0	3RT10 34-3□●●0	
	40	60	3	7.5	10	15	30	40	0 0	0 0	3RT10 35-1□●●0	3RT10 35-3□●●0	
	50	60	3	10	15	15	40	50	0 0	0 0	3RT10 36-1□●●0	3RT10 36-3□●●0	
S3	65	100	5	15	20	25	50	60	0 0	0 0	3RT10 44-1□●●0	3RT10 44-3□●●0	1.8/2.8
	80	120	7.5	15	25	30	60	75	0 0	0 0	3RT10 45-1□●●0	3RT10 45-3□●●0	
	95	120	10	—	30	30	75	100	0 0	0 0	3RT10 46-1□●●0	3RT10 46-3□●●0	

AC Coil = A
DC Coil = B

A
B

NEMA Labeled Contactors

NEMA size	Amp ratings	Single phase HP ratings		Three phase HP ratings				Auxiliary contacts		Screw terminals with AC coil	Screw terminals with 24 V DC coil	Weight approx AC/DC
		115 V	230 V	200 V	230 V	460 V	575 V	NO	NC	Order No.	Order No.	
0	18	1	2	3	3	5	5	1	0	3RT10 17-1A●●1-0UA0	3RT10 17-1BB41-0UA0	0.20/0.26
1	27	2	3	7.5	7.5	10	10	0	0	3RT10 26-1A●●0-0UA0	3RT10 26-1BB40-0UA0	0.35/0.58
2	45	3	7.5	10	15	25	25	0	0	3RT10 36-1A●●0-0UA0	3RT10 36-1BB40-0UA0	0.85/1.45
3	90	10	20	25	30	50	50	0	0	3RT10 46-1A●●0-0UA0	3RT10 46-1BB40-0UA0	1.8/2.8

¹⁾ All terminals are spring loaded on frame size S00. Only the coil terminals are spring loaded on frame sizes S0, S2 & S3.

For further coil voltages, see page 2/23.
For auxiliaries and accessories, see page 2/35-51.
For spare parts, see page 2/54-58.
For technical data, see page 2/86-107.
For description, see page 2/65-66.
For int. circuit diagrams, see page 2/156.
For dimension drawings, see page 2/172-175.

AC Coil Selection for 3RT101 through 3RT104, □ = A							
Coil Code	C2 ²⁾	H2 ³⁾	K6	P6	U6	V6	T6
60 Hz	24 V	48 V	120 V	240 V	277 V	480 V	600 V
50 Hz	24 V	48 V	110 V	220 V	—	—	—

²⁾ Use code **B0** for 3RT101, S00
³⁾ Use code **H0** for 3RT101, S00

DC Coil Selection for 3RT101 through 3RT104, □ = B							
Coil Code	A4 ⁴⁾	B4	W4	E4	F4	G4	M4
DC	12 V	24 V	48 V	60 V	110 V	125 V	220 V

⁴⁾ 3RT101 Only



3RT10 contactors, 3-pole


Dimension drawings

3RT10 1 contactors

Size S00 and NEMA Size 0, screw connection

with surge suppressor, auxiliary switch block and mounted overload relay

Lateral clearance from
earthed parts = 6 mm

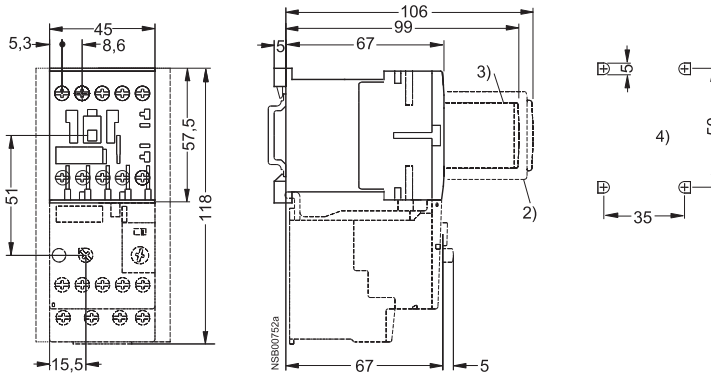


- 2) Auxiliary switch block
(also 3RH19 11- . NF . . solid-state
compatible design)
- 3) Surge suppressor
(also 3RT19 16-1GA00 additional
load module)
- 4) Drilling pattern

3RT10 1 contactors

Size S00, Cage Clamp connection


with auxiliary switch block

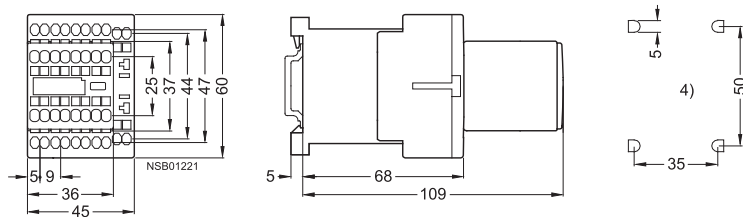

3RT10 2 contactors, 3RT10 2 coupling relays

Size S0 and NEMA Size 1, screw connection

with surge suppressor, auxiliary switch blocks and mounted overload relay

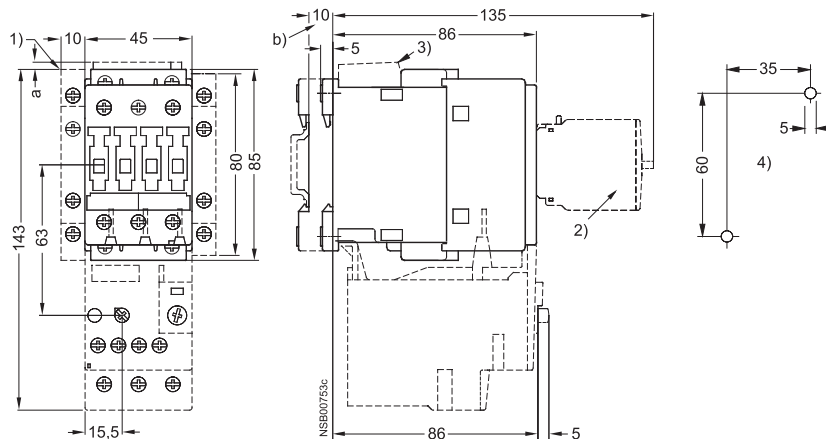

For size S0:

- a = 3 mm at < 240 V
- a = 7 mm at > 240 V
- b = DC 10 mm deeper than AC

- 1) Auxiliary switch block, laterally mountable
- 2) Auxiliary switch block, mountable on the front,
1, 2 and 4-pole (also 3RH19 21- . FE22
solid-state compatible design)
- 3) Surge suppressor
- 4) Drilling pattern