

1

Frame B MMP +  
Frame B Contactor



#### Factory-Assembled Motor Protective Device with Thermal and Magnetic Trip + Contactor— Maximum IEC Ratings<sup>①</sup>

FLA Adjustment  
Range/Overload  
Release— $I_r$   
(Amps)



FLA Adjustment Range/Overload Release— $I_r$ (Amps)	Short-Circuit Release— $I_m$ (Amps)	Three-Phase				Assembled Manual Motor Controller <sup>②</sup>	
		220– 240V	380– 415V	500V	660– 690V	Non-Reversing Catalog Number	Reversing Catalog Number
0.1–0.16	3.2	—	—	—	0.06	XTSCP16BB_	XTSRP16BB_
0.16–0.25	3.5	—	0.06	0.06	0.12	XTSCP25BB_	XTSRP25BB_
0.25–0.4	5.6	0.06	0.09	0.12	0.18	XTSCP40BB_	XTSRP40BB_
0.4–0.63	8.82	0.09	0.18	0.25	0.25	XTSCP63BB_	XTSRP63BB_
0.63–1	14	0.12	0.25	0.37	0.55	XTSC001BB_	XTSR001BB_
1–1.6	22.4	0.25	0.55	0.75	1.1	XTSC1P6BB_	XTSR1P6BB_
1.6–2.5	35	0.37	0.75	1.1	1.5	XTSC2P5BB_	XTSR2P5BB_
2.5–4	56	0.75	1.5	2.2	3	XTSC004BB_	XTSR004BB_
4–6.3	88.2	1.1	2.2	3	4	XTSC6P3BB_	XTSR6P3BB_
6.3–10	140	2.2	4	4	7.5	XTSC010BB_	XTSR010BB_
8–12	168	3	5.5	5.5	11	XTSC012BB_	XTSR012BB_
10–16	224	4	7.5	9	12.5	XTSC016BB_	—

Frame B MMP +  
Frame C Contactor



#### Factory-Assembled Manual Motor Controller—Frame B MMP + Frame C Contactor— Maximum UL Ratings<sup>①</sup>

FLA Adjustment  
Range/Overload  
Release— $I_r$   
(Amps)



FLA Adjustment Range/Overload Release— $I_r$ (Amps)	Short-Circuit Release— $I_m$ (Amps)	Three-Phase				Assembled Manual Motor Controller <sup>②</sup>	
		200V	240V	480V	600V	Non-Reversing Catalog Number	Reversing Catalog Number
10–16	224	3	3	10	10	XTSC016BC_	XTSR016BC_
16–20	280	5	5	10	15	XTSC020BC_	XTSR020BC_
20–25	350	5	7-1/2	15	20	XTSC025BC_	XTSR025BC_
25–32	448	7-1/2	10	20	25	XTSC032BC_	XTSR032BC_

Frame B MMP +  
Frame C Contactor



#### Factory-Assembled Manual Motor Controller—Frame B MMP + Frame C Contactor— Maximum IEC Ratings<sup>①</sup>

FLA Adjustment  
Range/Overload  
Release— $I_r$   
(Amps)



FLA Adjustment Range/Overload Release— $I_r$ (Amps)	Short-Circuit Release— $I_m$ (Amps)	Three-Phase				Assembled Manual Motor Controller <sup>②</sup>	
		220– 240V	380– 415V	500V	660– 690V	Non-Reversing Catalog Number	Reversing Catalog Number
10–16	224	4	7.5	9	12.5	XTSC016BC_	XTSR016BC_
16–20	280	5.5	9	12.5	15	XTSC020BC_	XTSR020BC_
20–25	350	5.5	11	15	22	XTSC025BC_	XTSR025BC_
25–32	448	7.5	15	22	30	XTSC032BC_	XTSR032BC_


#### Notes

- ① Select manual motor controllers by full load amperes. Maximum motor ratings (kW, hp) are for reference only.
- ② Underscore (\_) indicates magnetic coil suffix required. See **Page V5-T1-198**.

1

Approximate Dimensions in mm [in]

#### XTSC...BC\_

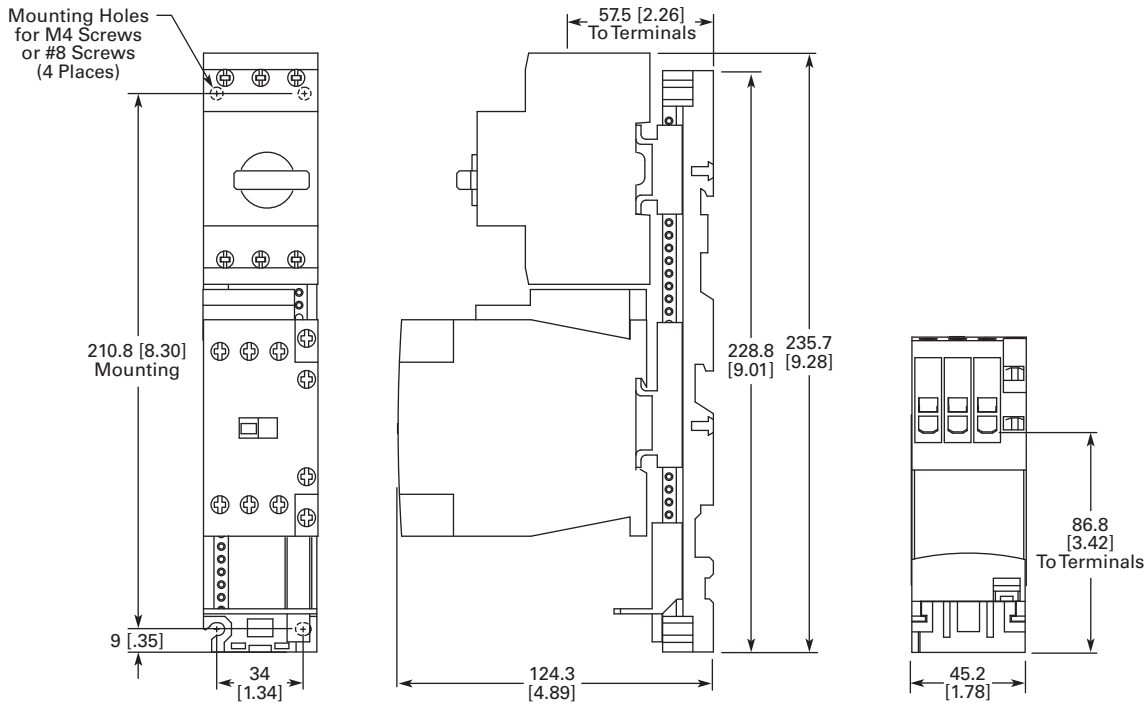

#### XTSR...BC\_

